
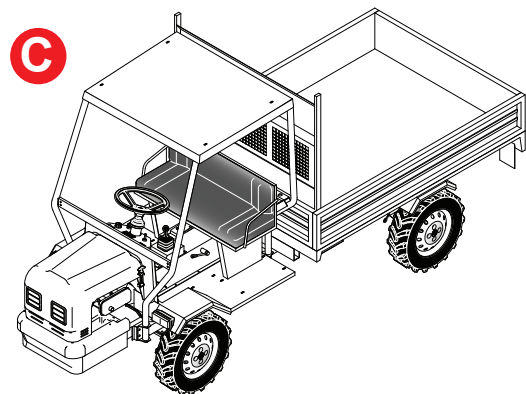
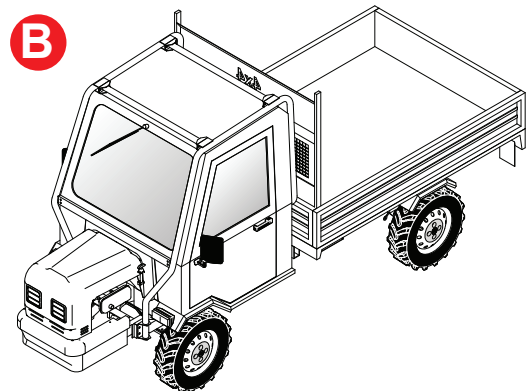


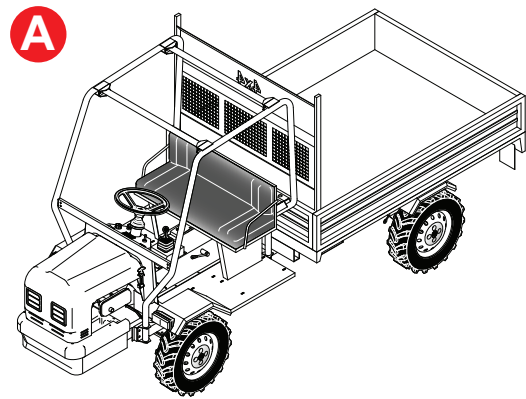

ALLESTIMENTI E ATTREZZATURE COMUNI BODY VARIANTS AND IMPLEMENTS

A	Allestimento standard <i>Naked vehicle</i>
B	Veicolo allestito con cabina chiusa, vetri temperati e tergicristallo <i>Vehicle fitted with cab, safety glasses and windscreen whiper</i>
C	Veicolo allestito con tettuccio rigido in lamiera di acciaio <i>Vehicle fitted with hard top in galvanised steel</i>

RIVENDITORE AUTORIZZATO / AUTHORIZED DEALER:

I dati, gli schemi e le raffigurazioni di questo stampato sono forniti a titolo indicativo. L'allestimento dei veicoli ed i relativi optional possono variare per specifiche esigenze tecniche e/o di mercato. La COMACA s.r.l. si riserva di apportare in qualunque momento e per qualsiasi motivo modifiche ai veicoli senza preavviso.

The drawings and illustrations included in this folder are purely indicative and are not binding. In keeping with its commitment to constantly improve its products and/or for market-related reasons, COMACA s.r.l. may make modifications of any type at any time without prior notice.



COSTRUZIONE MACCHINE MULTIUSO 4WD

COMACA s.r.l.

Sede, stabilimento e assistenza: località Casale (Area P.I.P.) - 84030 Caggiano (SA) - ITALY
Tel. +39.0975.393005 / 393735 - Fax +39.0975.393866

internet: www.comaca.it

e-mail: info@comaca.it



multi-functional TRANSPORTER
4WD

Rambo ECON 4x4

TRATTRICE AGRICOLA • Agricultural transporter
MACCHINA OPERATRICE MULTIUSO • Work Vehicle



STUDIO PUCCIARELLI
studio.pucciarelli@alice.it



www.comaca.it




Transporter

Rambo ECON 4x4



TRATTRICE AGRICOLA • Agricultural transporter
MACCHINA OPERATRICE MULTIUSO • Work Vehicle

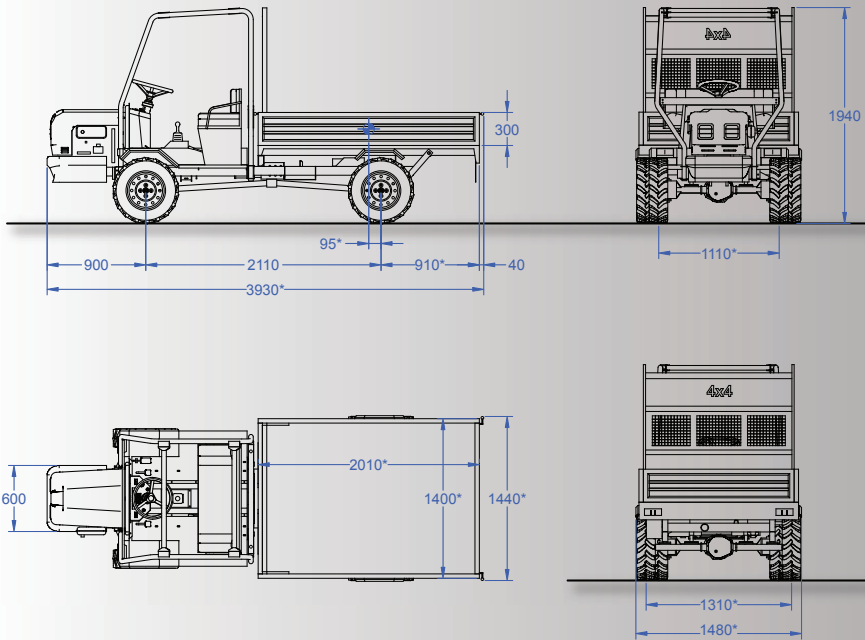

* DISPONIBILE VERSIONE COMPACT, LARGHEZZA 1.20 m (cassone 1800 x 1200 x h 300 mm)
Compact version available, whidt 1.20 m (body 1800 x 1200 x h 300 mm)



CARATTERISTICHE TECNICHE / TECHNICAL SPECIFICATION

VERSIONE VERSION	MOTORE ENGINE	CIL. n°	CILINDRATA DISPLACEMENT (cm³)	POTENZA MAX. POWER kW (CV)	RAFFREDDAMENTO ENGINE COOLING
RAMBO ECON / L	LOMBARDINI 12LD477-2/B3	2	954	17.0 (23.1) @ 3600 RPM	Aria /Air
RAMBO ECON / L1	LOMBARDINI 9LD625/2	2	1248	18.8 (26.0) @ 3000 RPM	Aria /Air



- TRAZIONE:** 4 ruote motrici sempre in presa (disponibile a richiesta con disinnesto della trazione anteriore con le marce veloci)
- CAMBIO:** sincronizzato 10 velocità avanti + 2 RM (5+1 ridotte, 5+1 veloci).
- SOSPENSIONI:** assali rigidi (disponibili a richiesta balestre anteriori e/o posteriori).
- FRENI:** idraulici con pompa a doppio circuito, a tamburo posteriore a dischi anteriore. Freno di stazionamento meccanico sull'asse posteriore.
- RUOTE:** 6.5/80x15 TM.
- TELAIO:** tubolari e lamiera in acciaio, con snodo centrale su cuscinetti a rulli conici per ottimizzare la trazione delle 4 ruote motrici.
- CASSONE:** 2010 x 1400 x h 300 mm (disponibile versione 1.2 compatta 1800 x 1200 x h 300)
- PORTATA:** max 1100 kg - massa a pieno carico 2000 kg
- VELOCITÀ MAX:** max 30.68 km/h.
- GUIDA** n° 1 posto a guida centrale con roll-bar anti-schiacciamento omologato, cintura di sicurezza omologata, quadro di accensione a chiave, contaore, acceleratore a pedale.
- ACCESSORI DI SERIE:** ruota di scorta, contaore, n° 2 specchietti retrovisori, attacco presa di forza, impianto luce regolamentare, roll-bar anti-schiacciamento omologato, marmitta a distanza, serbatoio a distanza, accessori d'uso, manuale uso e manutenzione; colore standard: rosso.
- OPZIONAL:** ribaltamento elettro-idraulico del cassone, cabina con vetri temperati e tergicristallo, tettuccio rigido in lamiera di acciaio, telaio protezione (dietrocabina), gruppo presa di forza posteriore con cardano e acceleratore a mano, gancio traino non omologato, balestre anteriori e/o posteriori, colori diversi da catalogo, ecc.



- DRIVE:** permanent 4-wheel drive (optionally available with disengagement of front-wheel drive in high-range gears)
- GEARBOX:** synchronized 10 speed forward + 2 RM (5+1 reduced, 5+1 increased).
- SUSPENSION:** rigid axle (front and/or rear leaf springs available as an option).
- BRAKES:** hydraulic with dual-circuit pump, rear drum brakes and front disc brakes. Mechanical parking brake on rear axle.
- WHEELS/TYRES:** 6.5/80x15 TM.
- CHASSIS:** tubular profiles and sheet steel with central joint on tapered roller bearings to optimise traction of the 4 driven wheels.
- BODY:** 2010 x 1400 x h 300 mm (compact version available 1800 x 1200 x h 300)
- PAYLOAD:** max 1100 kg - gross vehicle weight rating 2000 kg
- MAX SPEAD:** max 30.68 km/h.
- DRIVER POSITION:** 1 central driver position with type-approved steel crush-protection, type-approved seat-belt, key-operated ignition panel, hourmeter, pedal-operated accelerator.
- EQUIPMENT:** spare wheel, hours cuonter, n° 2 rearview mirror, predisposition of PTO, regular lighting system, type-approved steel crush-protection, remote-mounted silencer, remote-mounted fuel tank, user accessories, use and maintenance manual, standard colour: red.
- OPZIONAL:** electro-hydraulic tipping of body, cab with tempered glass and windscreen wiper, hard top in galvanised steel, supergates, rear protection frame, rear PTO unit with drive shaft and manual accelerator, non-type-approved tow bar, front and rear leaf-springs, colours other than the standard red to be chosen from the catalogue, ecc.